

CDMA-05

Features:

Specially Designed for CDMA Repeater
Conforms to Technical Standards of ITU
High Rejection
High Power Handling Ability

Applications:

CDMA Optical Fiber Repeater



Electrical Specifications:

Frequency Range: 825 to 835MHz
Insertion Loss: 2dB maximum
1.5dB typical
Ripple in Band: 1dB p-p maximum
Return Loss: 20dB minimum
Rejection out band:
≥40dB @ $f_0 \pm 7.5\text{MHz}$
≥90dB @ $f_0 \pm 40\text{MHz}$

Power Handling:


Power of CDMA signal: 50 watts
Operating Temperature: -30 to +55 °C
Storage Temperature: -40 to +85 °C
Operating Humidity: 0 to 90%, relative
Connectors: SMA/SMA

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.

Outline Drawing:

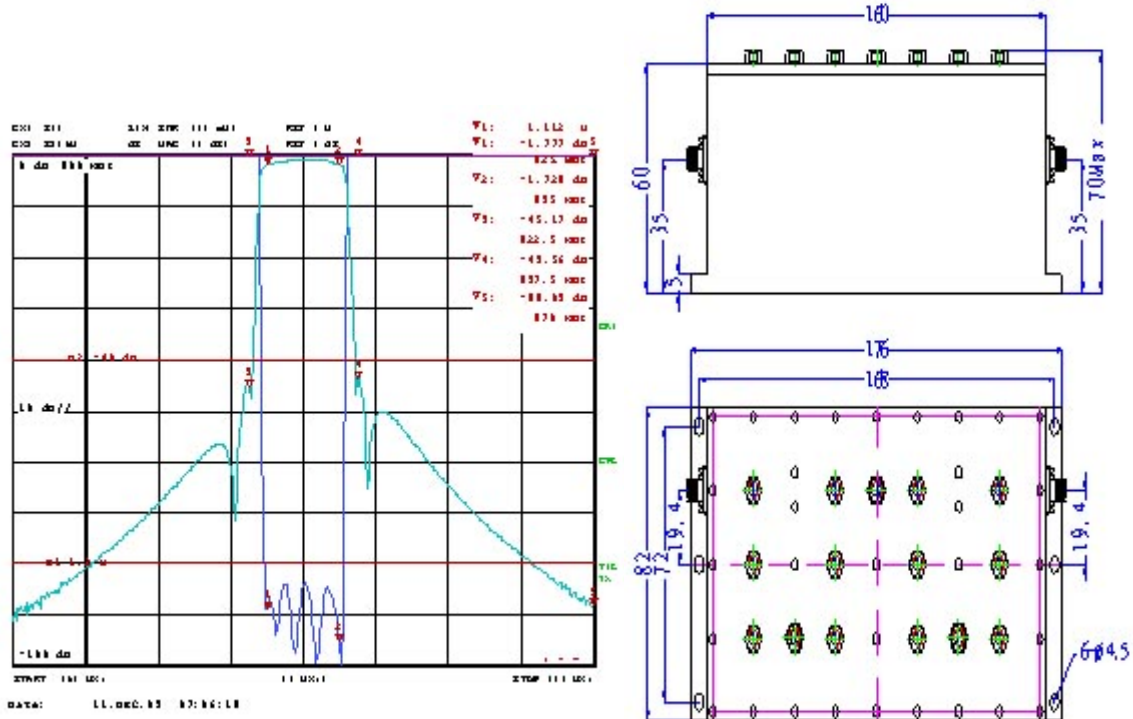

Notes:

Connectors are optional of N or SMA, according to requirement.

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.