


CORRY Micronics

FP Attenuation Characteristics

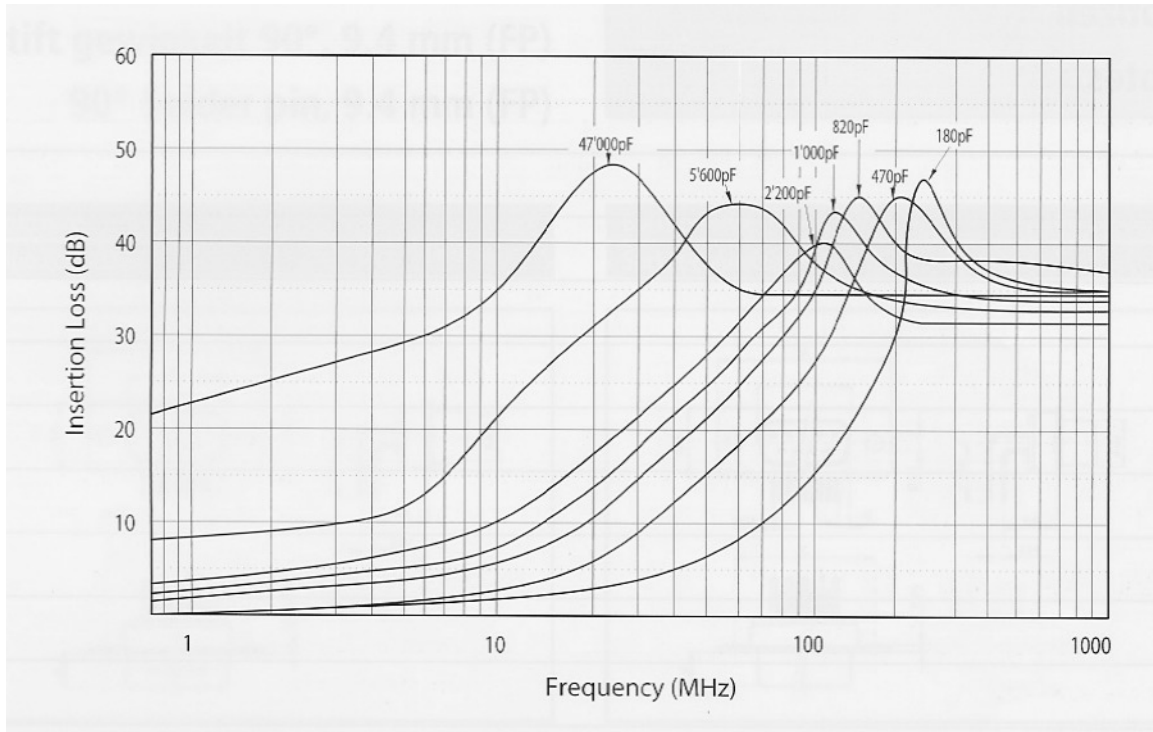

Minimum Insertion Loss (dB)

Filter Capacitance (pF)	180 ±20%	470 ±20%	820 ±15%	1000 ±15%	2200 ±15%	5600±20%
(@ 25°C, 1 kHz, 1.0 VRMS)						
Dielectric Material	NPO	X7R	X7R	X7R	X7R	X7R
Insertion Loss (dB minimum)						
.1 MHz	-	-	-	-	-	-
.5 MHz	-	-	-	-	-	3
1 MHz	-	-	-	-	1	5
5 MHz	-	1	1	1	5	11
10 MHz	-	2	3	3	8	16