



CORRY MICRONICS, INC PRODUCT SPECIFICATION

CMIPS250290B8 8-bit Dispersive Phase Shifter

Electrical Specifications

Parameters	Specifications
Frequency Range	25 ~ 29 GHz
Insertion Loss	≤ 12 dB
VSWR	≤ 1.8:1
Phase Shift	Step 1.4°, 8 bit
Phase Shift Accuracy	≤ ±5° @ 27 GHz (Center Frequency)
Amplitude Ripple	≤ ±1 dB Over Frequency and Phase Range
Phase Balance	≤ ±3° @ Between All the Same Batch Switches
Max Input Power	+30 dBm
Power Supply	+5 V (180 mA), -5 V (180 mA)
Port Connectors	SMA-Female
Operating Temperature	-40 °C ~ +70° C
Surface Finish	Natural Color Conductive Oxidation
Dimensions	See Attached Drawing (All measurements are in mm)

Truth Table

E1	E2	E3	E4	E5	E6	E7	E8	180°	90°	45°	22.5°	11.25°	5.625°	2.8°	1.4°	
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
1	0	0	0	0	0	0	0	180°	0	0	0	0	0	0	0	
0	1	0	0	0	0	0	0	0	90°	0	0	0	0	0	0	
0	0	1	0	0	0	0	0	0	0	45°	0	0	0	0	0	
0	0	0	1	0	0	0	0	0	0	0	22.5°	0	0	0	0	
0	0	0	0	1	0	0	0	0	0	0	0	11.25°	0	0	0	
0	0	0	0	0	1	0	0	0	0	0	0	0	5.625°	0	0	
0	0	0	0	0	0	1	0	0	0	0	0	0	0	2.8°	0	
0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1.4°	
1	1	1	1	1	1	1	1									358.575°

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.


Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 06/21/2019



CORRY MICRONICS, INC PRODUCT SPECIFICATION

Outline Drawing

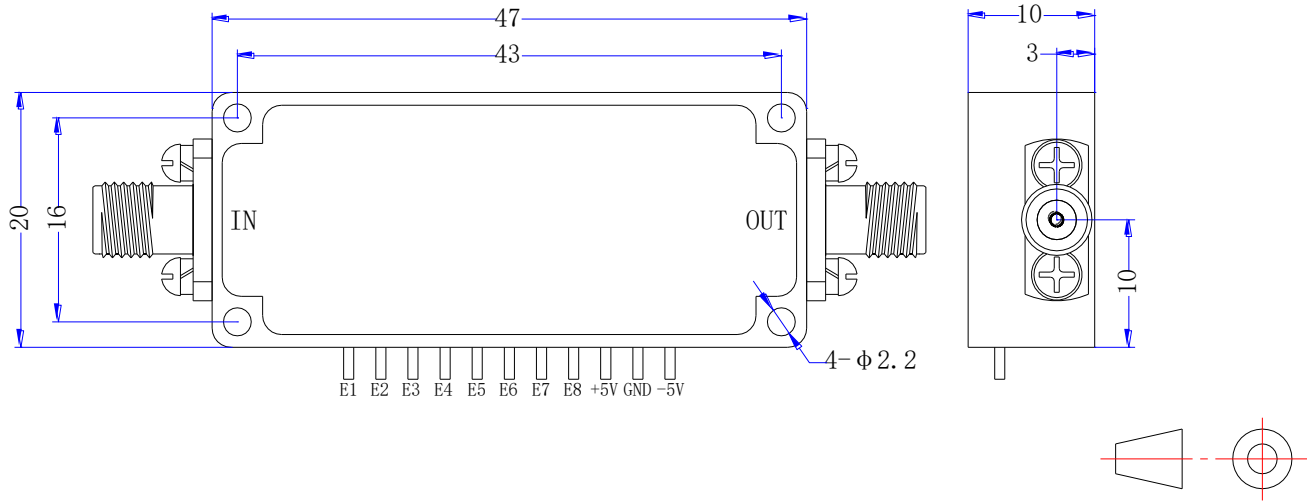

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 06/21/2019