


SIZE	FILTER TYPE	CAPACITANCE (pF)		VOLTAGE		CURRENT RATING	CONTACT RESISTANCE	MINIMUM ATTENUATION (dB)							
		MIN	MAX	WVDC	DWV			5 MHz	10 MHz	20 MHz	50 MHz	100 MHz	200 MHz	500 MHz	1 GHz
50	Pi	1000	2000	100	250	5A	.010 Ohms		5	9	19	30	43	62	70

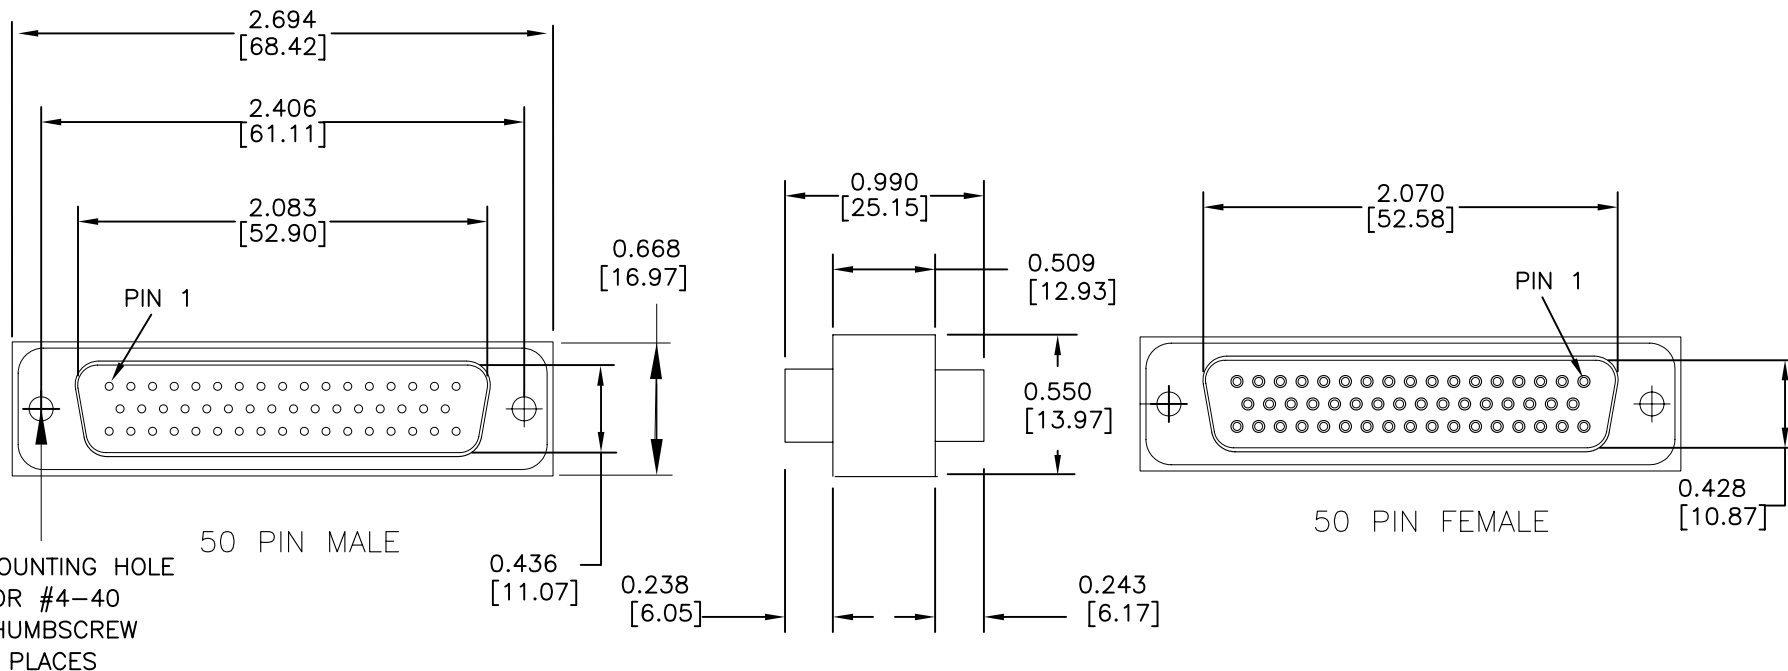

NOTES

- 1) SHELLS: STEEL, TIN PLATED.
- 2) CONTACTS: COPPER ALLOY, GOLD PLATED, .000010" TYP.
- 3) INSULATORS AND BACK COVER: PLASTIC, UL94-V0.
- 4) OPERATING TEMPERATURE: -55°C TO +125°C.
- 5) MARKING: PART NUMBER IS INK STAMPED ON REAR COVER.
- 6) EACH UNIT INCLUDES TWO #4-40 THUMBSCREWS (NOT SHOWN). EACH THUMBSCREW IS CAPTIVE WITHIN THE MOUNTING HOLES.

REV	A																
C.O.	--																
DATE	10/26/06																

ALL DIMENSIONS ARE IN INCHES (mm)

GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED

DECIMAL: ± .025 [.64]

ANGLES: ± 1°

CAGE CODE  
15717

**CORRY**  
**Micronics**

One Plastics Rd. - Corry, PA 16407  
(814) 664-7728 FAX (814) 664-4582  
www.cormic.com

Dwg By: RPM Date: 10/26/06 Chk'd By: RPM

Scale: 1X File: Sheet:

50 PIN, ADAPTER, 1000 PF "Pi"

DSP50-300-F00