


FP09 Style Filter Plate

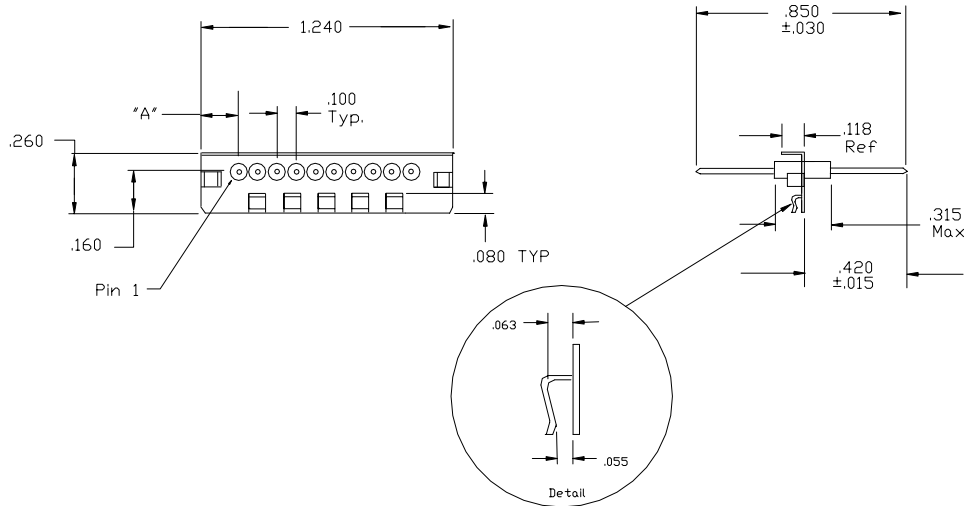

Materials:

Plate: Copper Alloy, Matte Tin Plated
 Leads: Copper Alloy, .025" ± .002" Dia, Gold Plated

Working Voltage: 100 VDC
 Max. Current: 5 Amps DC
 Insulation Resistance @ 25 °C: 10 GΩ Min.
 Operating Temperature: -55 °C - +125 °C

Filtering Options: See Filter Options Chart
 Lead Configurations: See Lead Options Chart

| No. of Filtered Lines | "A" |
|-----------------------|------|
| 1 or 2 | .570 |
| 3 or 4 | .470 |
| 5 or 6 | .370 |
| 7 or 8 | .270 |
| 9 or 10 | .170 |

Ordering Information:

| Style | # of Rows | # of Filters Per Row | Lead Configuration | Filter Design |
|--------|-----------|----------------------|----------------------|-----------------------------|
| FP09 - | 1 | 10 (01 thru 10) | - S (S,L,R, or B) | - Q (See Filter Options) |

Example: Part Number: FP09 -110-SQ
 Description: FP09 Style Plate, 1 row of 10, Straight Leads, 1000 pF "Pi" Circuit.

Only available in single row.
 For custom lead configurations consult the factory.

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407 (814) 664-7728 Fax (814) 664-4582

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.