


## FT22-02-XXXX FEEDTHRU CAPACITOR

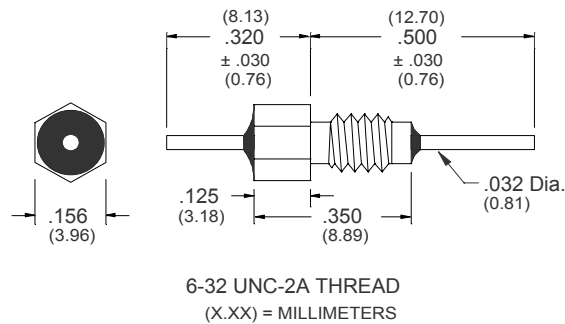

### Materials:

Case: Gold Plated Per Mil-G-45204C, Class 00  
 Lead: Gold Plated Per Mil-G-45204C, Class 00  
 Epoxy Sealed, Both Ends

Insulation Resistance @ 25 °C: 10 GΩ Min.  
 Dissipation Factor: .035 Max.  
 Max. Current: 10 Amps DC  
 Operating Temperature: -55 °C - +125 °C  
 Recommended Mounting Torque: 3 Inch/Lbs Max.

PART NUMBER	CAPACITANCE	TOLERANCE	WVDC	DWV	TYPICAL NO LOAD INSERTION LOSS (dB) @ 25 °C PER MIL-STD-220			
					1 MHZ	10 MHZ	100 MHZ	1GHz
FT22-02-102P	1,000 pF	-0% +100%	100	250	-	5	20	28
FT22-02-152P	1,500 pF	-0% +100%	100	250	-	5	25	30
FT22-02-302P	3,000 pF	-0% +100%	100	250	-	10	30	42
FT22-02-502P	5,000 pF	-0% +100%	100	250	-	15	35	42

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407  
 (814) 664-7728 Fax (814) 664-4582 [www.cormic.com](http://www.cormic.com)**