


## HS72-XX-XXXX HERMETICALLY SEALED FILTERS

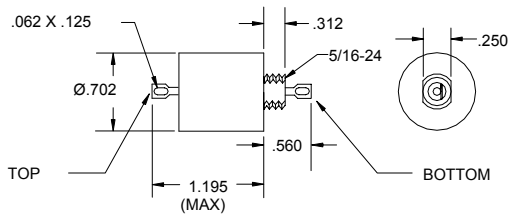


Case: Tin/lead Plated, Hermetically Sealed.

I.R. @ 25 °C: 1000Ω-F Min.

Rated Voltage: See Table

Capacitance: @ 1kHz, 25°C (See Table)

Operating Temperature: -55 °C - +125 °C



PART NUMBER	RATED DC VOLTS	RATED AC VOLTS	I (Amps)	Crkt	CAP (uF)	DCR (Ohms)	TYPICAL NO LOAD INSERTION LOSS (dB) @ 25 °C PER MIL-STD-220						
							30 kHz	150 kHz	300 kHz	1 MHz	10 MHz	100 MHz	1 GHz
HS74-21-1001	100	-	.5A	Pi	2.8	.35	37	70	70	70	70	70	70
HS74-21-11001	100	-	1.0A	Pi	2.8	.21	35	69	70	70	70	70	70
HS74-21-1501	100	-	5.0A	Pi	2.8	.01	-	38	58	70	70	70	70
HS74-21-1601	100	-	10.0A	Pi	2.8	.005	20	30	40	46	70	70	70
HS74-21-2001	200	125	.5A	Pi	.72	.35	-	55	70	70	70	70	70
HS74-21-2101	200	125	1.0A	Pi	.72	.21	-	53	70	70	70	70	70
HS74-21-2501	200	125	5.0A	Pi	.72	.01	-	11	31	65	70	70	70
HS74-21-2601	200	125	10.0A	Pi	.72	.005	-	6	24	56	70	70	70
HS74-21-4001	400	240	.5A	Pi	.30	.35	-	38	62	70	70	70	70
HS74-21-4101	400	240	1.0A	Pi	.30	.21	-	37	55	70	70	70	70
HS74-21-4501	400	240	5.0A	Pi	.30	.01	-	-	30	60	70	70	70
HS74-21-4601	400	240	10.0A	Pi	.30	.005	-	11	-	39	70	70	70

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407  
(814) 664-7728 Fax (814) 664-4582 [www.cormic.com](http://www.cormic.com)**

Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.