
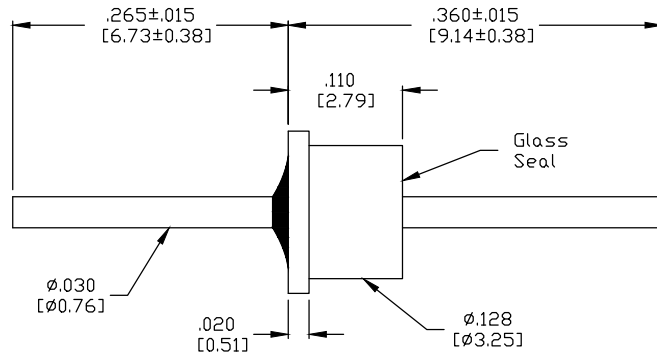


GC128-500-XXXX/C GLASS SEALED SOLDER-IN CAPACITOR SPACE RATED

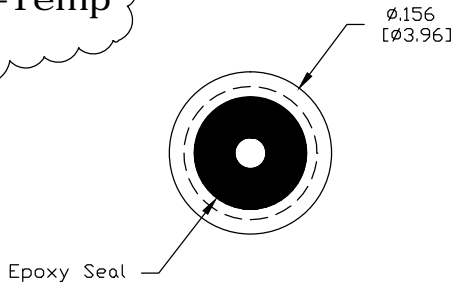

[X.XX] = MILLIMETERS

Materials:

- Case: Steel.
- Lead: Alloy 52.
- Finish: Gold Plated per MIL-G-45204, Type III, Class 00.
(Gold Bonding Option Available.)
- Epoxy Sealed, Flange End.
- Hermeticity: $\leq 1 \times 10^{-8}$ Atm-cc/sec Per MIL-STD-883.
- Tested to applicable requirements of MIL-PRF-28861/12, Class B or S.

- Maximum Soldering Temperature: 300°C
- Operating Temperature: -55°C to +125°C.
- Insulation Resistance @ 25°C: 10 GOhm Min.
(5 GOhm For .027 uF and higher.)
- Dissipation Factor: 3.5% Max.
- Max. Current: 5 Amps DC.

PART NUMBER	CAPACITANCE	TOLERANCE	COLOR CODE	WVDC	DWV	TYPICAL NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220			
						1 MHz	10 MHz	100 MHz	1 GHz
GC128-500-000/C	5 pF Max.	-	Green Green	100	250	-	-	-	-
GC128-500-100P/C	10 pF	-0% +100%	Violet Violet	100	250	-	-	-	5
GC128-500-101P/C	100 pF	-0% +100%	Green	100	250	-	-	3	20
GC128-500-501P/C	500 pF	-0% +100%	Brown	100	250	-	-	15	35
GC128-500-102P/C	1,000 pF	-0% +100%	Grey	100	250	-	5	20	35
GC128-500-272P/C	2,700 pF	-0% +100%	Red	100	250	-	10	25	40
GC128-500-502P/C	5,000 pF	-0% +100%	Yellow	100	250	-	15	30	45
GC128-500-153P/C	.015 μ F	-0% +100%	Orange	50	125	7	20	35	55
GC128-500-273P/C	.027 μ F	-0% +100%	Red Red	50	125	10	28	42	65
GC128-500-303P/C	.03 μ F	-0% +100%	Orange Orange	50	125	10	28	42	65
GC128-500-503P/C	.05 μ F	-0% +100%	Yellow Yellow	50	125	15	35	45	70

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. 1 Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com

Corry Micronics Inc, herein referred to as CMI, believes this information to be accurate, but makes no warranties, expressed or implied, as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential, arising from the use of our products. User assumes all risk whatsoever, in connection with it's intended use. CMI also reserves the right to change this document without notice.