



**HS74-21-6601  
HERMETICALLY SEALED FILTERS  
600 VDC RATED**

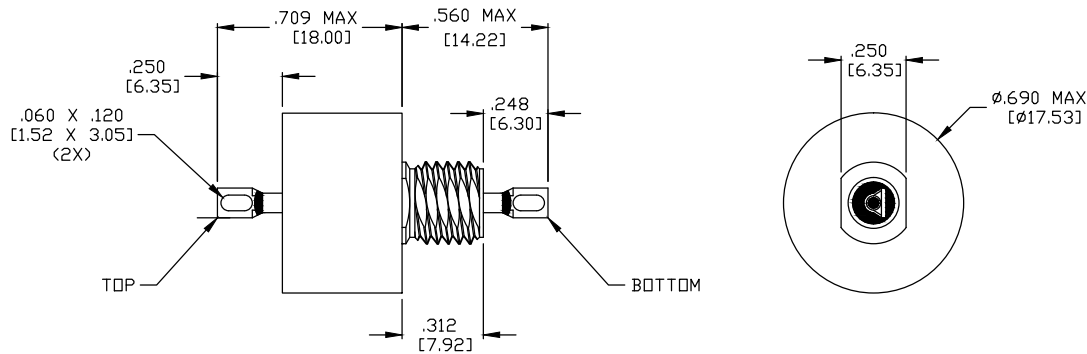

**5/16-24 UNF-2A THREAD**  
[X.XX] = MILLIMETERS



**Materials:**

Case: Steel.  
Lead: Copper.  
Finish: Tin/Lead Plated, Hermetically Sealed.  
Mounting Torque: 8.0 in-lbs Max.  
Dielectric Withstanding Voltage (DWV): 1250 VDC, 5 Sec.

Maximum Soldering Temperature: 260C  
Operating Temperature: -55C to +125C.  
Insulation Resistance @ 25C: 1000 MOhms Min.  
DCR: 0.005 Ohms Max.  
Dissipation Factor: 4.0% Max.

PART NUMBER	RATED DC VOLTS	RATED AC VOLTS	I (AMPS)	CIRCUIT	CAP (pF) +/- 20%	TYPICAL NO LOAD INSERTION LOSS (dB) @ 25C PER MIL-STD-220						
						30 kHz	150 kHz	300 kHz	1 MHz	10 MHz	50 MHz	1 GHz
HS74-21-6601	1000	-	10	Pi	2000					10	37	

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407  
(814) 664-7728 Fax (814) 664-4582 www.cormic.com**

Corry Micronics Inc, herein referred to as CMI, believes this information to be accurate, but makes no warranties, expressed or implied, as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential, arising from the use of our products. User assumes all risk whatsoever, in connection with it's intended use. CMI also reserves the right to change this document without notice.