




CMIAT-0030A6P25N

Coaxial Fixed Attenuator

Electrical Specifications

Parameters	Specifications
Frequency Band	DC-3 GHz
VSWR	$\leq 1.20:1$
Attenuation	6 dB
Attenuation Accuracy	± 0.5 dB
Power Handling	25 W
Port Connectors	Input Port: N-Male / Output Port: N-Female
Temp. Range	-55°C~+125°C
Surface Finish	Oxidative Blackening (Heat Sink)
Dimensions	See Attached Drawing (Dimensions are in inches[mm])

Outline Drawing

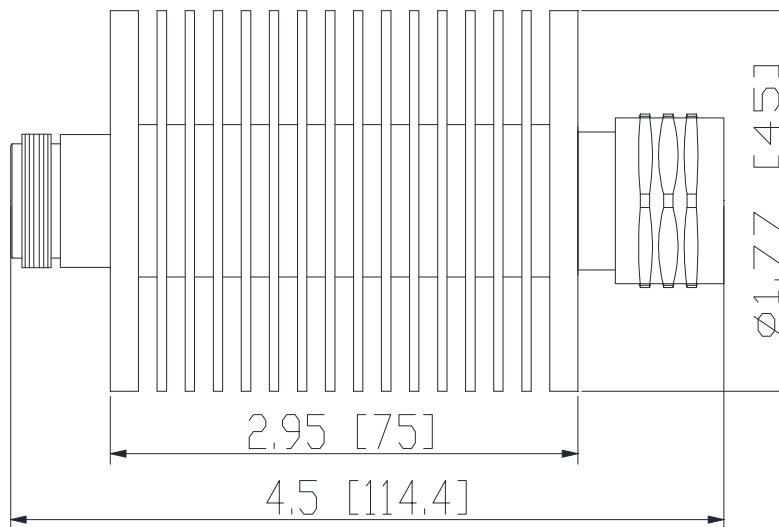

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com