




CORRY MICRONICS, INC PRODUCT SPECIFICATION

CMIBPF-550X50-1/-2 Band Pass Filter

Parameters	Specifications
Frequency Range	525~575MHz
Insertion Loss	≤0.8dB
Return Loss	≥16dB
Rejection	≥60dB @500MHz ≥60dB @600MHz
Power Handling	10W
Connectors	SMA-Female (-1 Option) N Type- Female (-2 Option)
Ports Impedance	50 Ω
Operating Temperature	-20°C~+60°C
Surface Finish	Black Paint
Configuration	As Below -2 Option Shown All Dimensions Are In mm

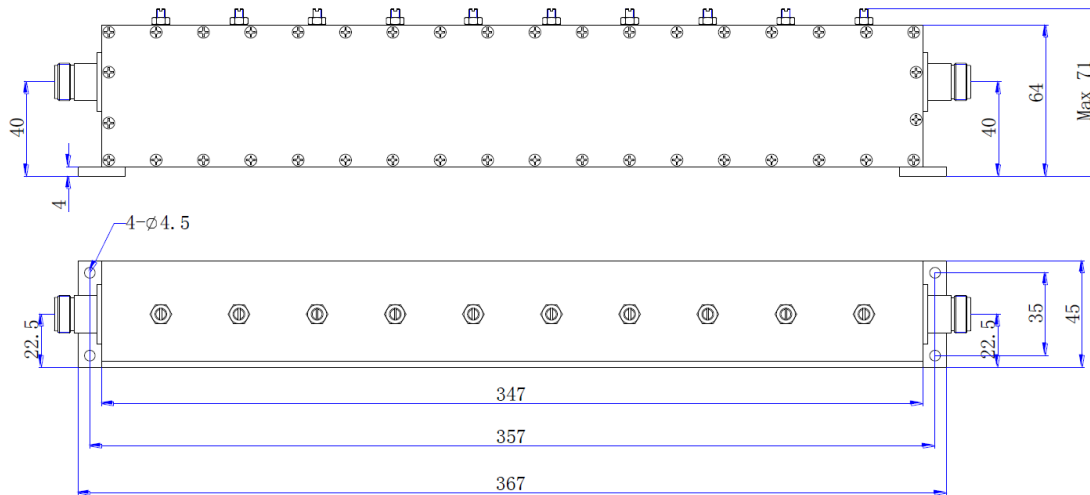

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 9/12/2018