



CORRY MICRONICS, INC **PRODUCT SPECIFICATION**

**CLB-BPF-20RX
BAND PASS FILTER
BAND 20 RX**


Parameter	Specification
Passband	832 MHz – 862 MHz
Passband Insertion Loss	2.0 dB max
Rejection	40 dB min @ 821 MHz 40 dB min @ 925 MHz
Return Loss	15 dB min.
Pass Band Ripple	±0.5 dB Max
Power	10 W
Impedance	50 Ω
Operating Temperature	-40° C to + 50° C
Dimensions	See Attached Drawing
Finish	Black Paint
Connectors	Field Replaceable SMA, Female

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 4/15/2019

Outline Drawing:

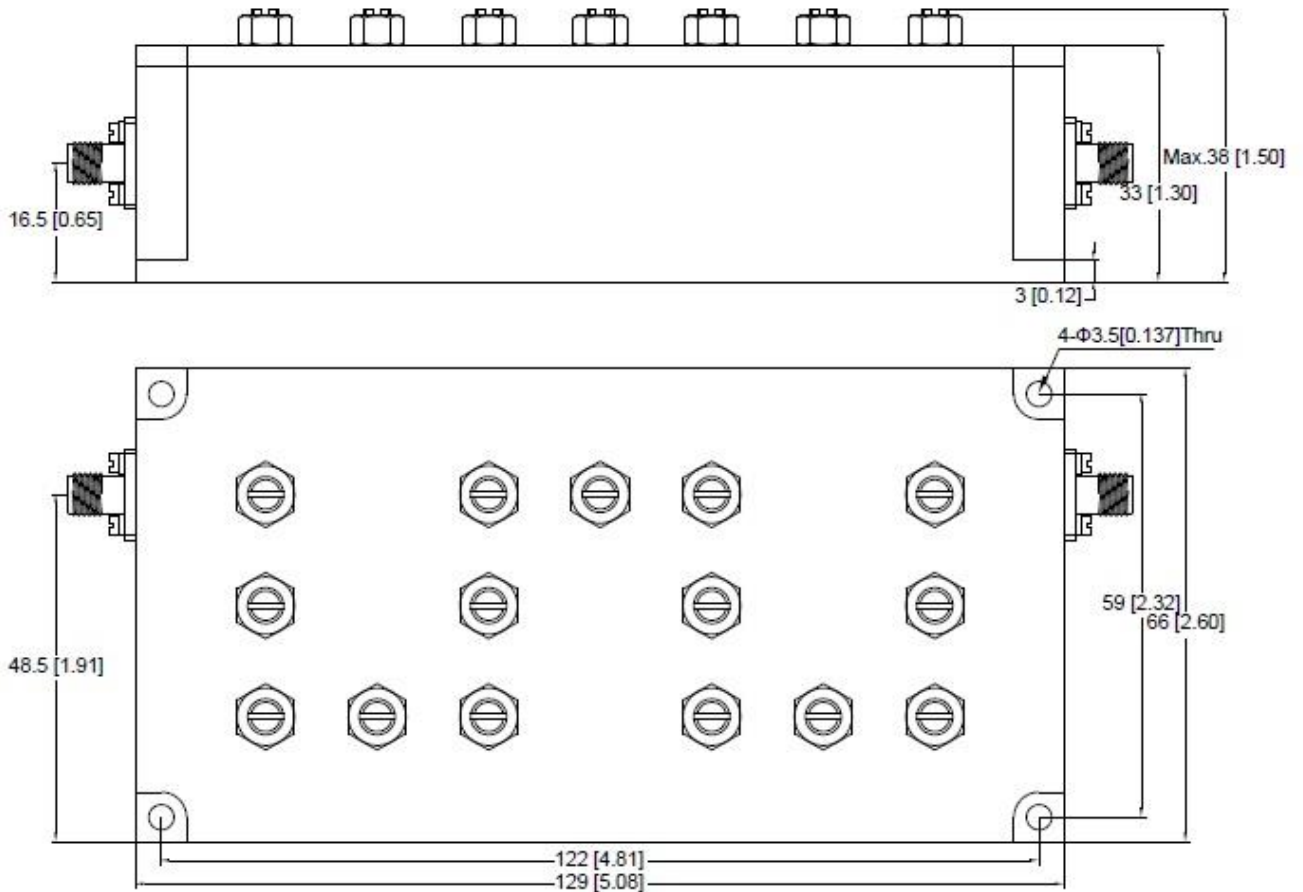

1. Dimensions are in mm [Inches]
2. Tolerances: Outline drawing: ± 0.2 [0.008]
Hole: ± 0.2 [0.008]

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 04/15/2019