



CORRY MICRONICS, INC **PRODUCT SPECIFICATION**

**CLB-BPF-26RX
BAND PASS FILTER
BAND 26 RX**


Parameter	Specification
Passband	814MHz -849MHz
Passband Insertion Loss	2.0dB max
Rejection	-40dB min @ 756MHz -40dB min @ 859MHz
VSWR	1.5:1 Max
Pass Band Ripple	± 0.5 dB
Power	10W
Impedance	50Ω
Dimensions	See Attached Drawing
Finish	Black Paint
Operating Temperature	-40°C to + 50°C
Connectors	Field Replaceable SMA, Female

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 4/15/2019

Outline Drawing:

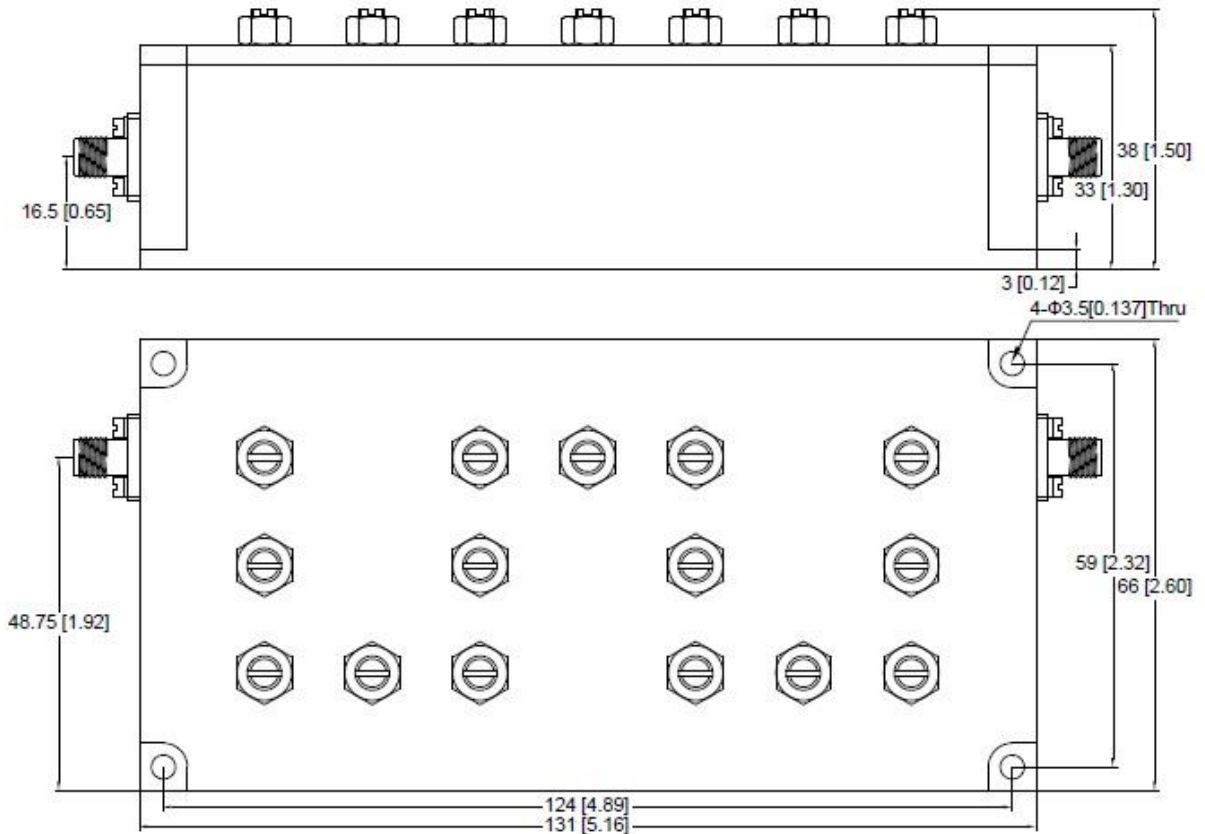

1. Dimensions are in mm [Inches]
2. Tolerances: Outline drawing: ± 0.2 [0.008]
Hole: ± 0.2 [0.008]

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 04/15/2019