



CORRY MICRONICS, INC PRODUCT SPECIFICATION

CMID-0.78-2.2GC2

Diplexer


Parameter	Specification
Passband RX	0.6 - 0.96 GHz
Passband TX	1.7-2.7 GHz
Insertion Loss	≤ 0.5 dB
VSWR Passband 1	≤ 1.3
VSWR Passband 2	≤ 1.3
Passband Rejection	≥50dB
Power Handling	RFIN: 75W RFOUT: 150W
Surface Finish	Black Paint
Operating Temperature	-40°C to +60°C
Storage Temperature	-55°C to +85°C
Connectors	SMA, Female

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 4/15/2019

Outline Drawing

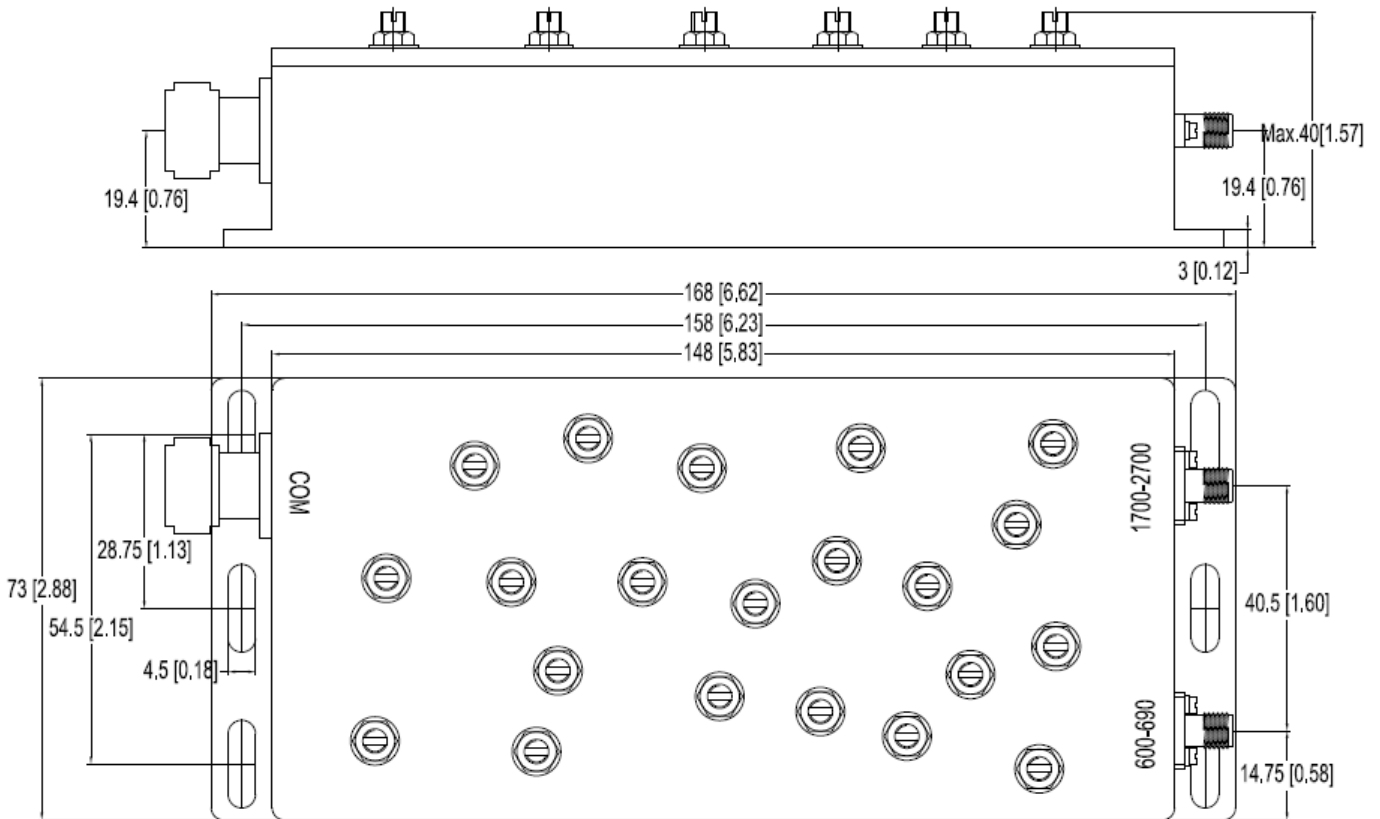

1. Dimensions are in mm [Inches]
2. Tolerances: Outline drawing: ± 0.2 [0.008]
Hole: ± 0.2 [0.008]

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 04/15/2019