




# CORRY MICRONICS, INC PRODUCT SPECIFICATION

## CMIDBPF-1930-1995 Dielectric Band Pass Filter

Parameter	Specification
Pass Band Frequency	1.93 to 1.995 GHz
Center Frequency	1.9625 GHz typ.
Insertion Loss	3 dB max
Ripple in Pass Band	±0.5 dB
VSWR	1.5:1
Rejection at 2F0 MHz	60 dB min
Rejection at 3F0 MHz	50 dB min
Impedance	50 Ω
Connectors	Field Replaceable SMA-F (2)
Operating Temperature	-40° C to +85° C
Storage Temperature	-55° C to +95° C
Finish	Conductive Oxidation

### Outline Drawing

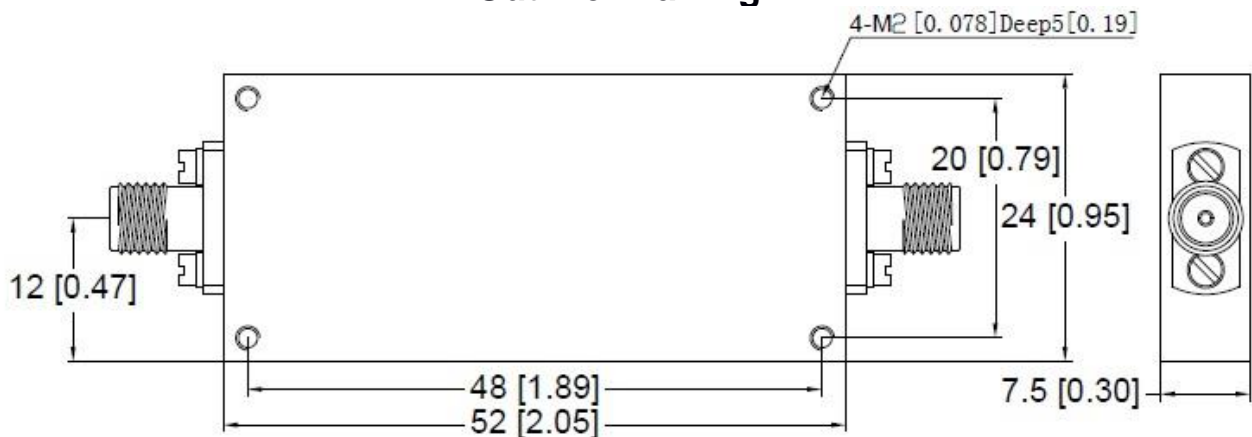

1. Dimensions are in mm [Inches]
2. Tolerances: Outline drawing: ±0.3 [0.011]  
Hole: ±0.2 [0.008]

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407**  
**(724) 940-7556 ext. 138 Fax (724) 940-7707 [www.cormic.com](http://www.cormic.com)**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 4/15/2019