


HS42-11-0607/C HERMETICALLY SEALED BUTTON FILTERS

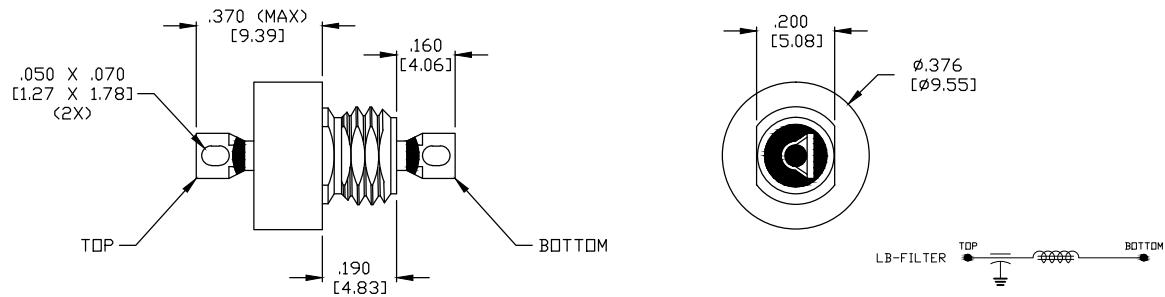

1/4-28 UNF-2A THREAD
[X.XX] = MILLIMETERS

Materials:

Case: Steel.
Lead: Copper Alloy.
Finish: Tin/Lead Plated, Hermetically Sealed.
Mounting Torque: 8.0 in-lbs Max.
Supplied with washer and nut.

Maximum Soldering Temperature: 260°C
Operating Temperature: -55°C to +125°C.
Insulation Resistance @ 25°C: 1000Ω-F Min.
DCR: 0.010Ω Max.
Dissipation Factor: 4% Max.

RATED DC VOLTS	RATED AC VOLTS	I (AMPS)	CIRCUIT	CAP (μF)	TYPICAL NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220						
					30 kHz	150 kHz	300 kHz	1 MHz	10 MHz	100 MHz	1 GHz
200	-	15	LB	0.3	7	19	25	35	55	70	70

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com

Corry Micronics Inc, herein referred to as CMI, believes this information to be accurate, but makes no warranties, expressed or implied, as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential, arising from the use of our products. User assumes all risk whatsoever, in connection with it's intended use. CMI also reserves the right to change this document without notice.